



INTERIOR
DOORS
SINGLE DOORS

ORDER QUOTE CONFIRMATION
FAX 253-383-2420 800-645-5975

APPROVED
BY _____
DATE _____

QUOTE/ORDER NUMBER _____

QUOTE TO: _____ SHIP TO: _____ DATE: _____
 ADDRESS: _____ ADDRESS: _____ PAGE: _____ OF _____
 PHONE # _____ CONTACT: _____ VIA: _____ EST. SHIP DATE _____
 PURCHASE ORDER# _____ MARK FOR: _____

PRICES ARE NET AND DO NOT INCLUDE SALES TAX
 -QUOTES ARE GOOD FOR 30 DAYS F.O.B. OUR WAREHOUSE CUSTOMER CRATING CHARGE \$ _____ FREIGHT CHARGE \$ _____

LINE #	QUAN.	SIZE	DOOR STYLE	BORE	JAMBS	HANDING (SEE NOTE BELOW)	DOOR #	EACH
LINE 1				2-3/8"	4-9/16" 4-13/16"	L (IN) R (IN) L (OUT) R (OUT)		\$ \$
LINE 2				2-3/8"	4-9/16" 4-13/16"	L (IN) R (IN) L (OUT) R (OUT)		\$ \$
LINE 3				2-3/8"	4-9/16" 4-13/16"	L (IN) R (IN) L (OUT) R (OUT)		\$ \$
LINE 4				2-3/8"	4-9/16" 4-13/16"	L (IN) R (IN) L (OUT) R (OUT)		\$ \$


LINE 1
 LINE 2
 LINE 3
 LINE 4

NOTE:
 ON INTERIOR DOORS IT IS ONLY NECESSARY TO NOTE IN-SWING OR OUT-SWING
 IF THERE ARE LOUVERS, WORDS SUCH AS "PANTRY" OR TEXTURED GLASS.

HINGES
 1-3/8" DOORS THICKNESS 3-1/2" .087
 GOOD BETTER BEST
 STEEL BASE NON-FERROUS BALL-BEARING

1-3/4" DOORS
 THICKNESS 4" .099
 GOOD BETTER BEST
 STEEL BASE NON-FERROUS BALL-BEARING

FINISHES
 STD US3-4 BRIGHT BRASS
 US3 POLISHED BRASS
 US10B OIL RUBBED BRONZE
 US15 SATIN NICKEL
 US26D BRUSHED CHROME
 US32D BRUSHED STAINLESS

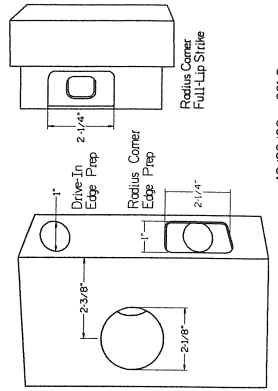

STANDARD BORE



20 MINUTE FIRE DOORS

ORDER QUOTE CONFIRMATION APPROVED
BY _____ DATE _____
FAX 253-383-2420 800-645-5975

QUOTE/ORDER NUMBER

QUOTE TO: _____ SHIP TO: _____ DATE: _____
ADDRESS: _____ ADDRESS: _____
PHONE # _____ CONTACT: _____ EST. SHIP DATE _____
PURCHASE ORDER# _____ MARK FOR: _____
F.O.B. OUR WAREHOUSE CUSTOMER CRATING CHARGE \$
FREIGHT CHARGE \$

PLEASE NOTE: USE THIS FORM FOR 20 MINUTE FIRE DOORS. SAVAGE WILL FURNISH THE APPROPRIATE WARNOCK-HERSEY LABEL FOR DOOR AND JAMB. 45, 60 AND 90 MINUTE RATED DOORS AND JAMBS ARE ALSO AVAILABLE. PLEASE CONTACT OUR OFFICE.
FOR MORE DETAILS ON LOCK BORE SPECS, SEE EXTERIOR DOOR FORM.

PRICES ARE NET AND DO NOT INCLUDE SALES TAX-QUOTES ARE GOOD FOR 30 DAYS

QUANTITY	SWING-OUT SILLS	SWING-IN	1-3/4" 20 MINUTE FIRE DOORS	SELF-CLOSING (SPRING)	FINISHES	SIZE	SPECIE	JAMBS	
#1	SWING-OUT SILLS <input type="checkbox"/> MILL/OAK BUMPER <input type="checkbox"/> BRONZE/OAK BUMPER <input type="checkbox"/> NICKEL/OAK BUMPER <input type="checkbox"/> BRONZE/COMPOSITE BUMPER BACKSET EDGE PREP <input type="checkbox"/> NO BORE <input type="checkbox"/> 2-3/8" <input type="checkbox"/> DRIVE-IN <input type="checkbox"/> SINGLE BORE <input type="checkbox"/> 2-3/4" <input type="checkbox"/> RADIUS CORNER <input type="checkbox"/> DOUBLE BORE <input type="checkbox"/> <input type="checkbox"/> MORTISE LOCK (TEMPLATE REQUIRED)	SWING-IN <input type="checkbox"/> MILL/OAK ADJUSTABLE <input type="checkbox"/> BRONZE/OAK ADJUSTABLE <input type="checkbox"/> NICKEL/OAK ADJUSTABLE <input type="checkbox"/> BRONZE/COMPOSITE ADJUSTABLE THICKNESS <input type="checkbox"/> 4" .106 <input type="checkbox"/> 4" .130 <input type="checkbox"/> 4-1/2" .134 <input type="checkbox"/> STEEL BASE <input type="checkbox"/> NON-FERROUS	LHSO RHHSI RHHSO OUTSIDE VIEW	GOOD <input type="checkbox"/> BETTER <input type="checkbox"/> BEST <input type="checkbox"/> STD US3-4 BRIGHT BRASS US3 POLISHED BRASS US10B OIL RUBBED BRONZE US15 SATIN NICKEL US26D BRUSHED CHROME US32D BRUSHED STAINLESS	THICKNESS <input type="checkbox"/> 4" .106 <input type="checkbox"/> 4" .130 <input type="checkbox"/> 4-1/2" .134 <input type="checkbox"/> STEEL BASE <input type="checkbox"/> NON-FERROUS	LHSO RHHSI RHHSO OUTSIDE VIEW	4-13/16" <input type="checkbox"/> 6-13/16" <input type="checkbox"/> 7-1/4" <input type="checkbox"/> Q-LON <input type="checkbox"/> BROWN <input type="checkbox"/> WHITE	PRIMED <input type="checkbox"/> HEMLOCK <input type="checkbox"/> VG FIR <input type="checkbox"/>	EACH
#2	SWING-OUT SILLS <input type="checkbox"/> MILL/OAK BUMPER <input type="checkbox"/> BRONZE/OAK BUMPER <input type="checkbox"/> NICKEL/OAK BUMPER <input type="checkbox"/> BRONZE/COMPOSITE BUMPER BACKSET EDGE PREP <input type="checkbox"/> NO BORE <input type="checkbox"/> 2-3/8" <input type="checkbox"/> DRIVE-IN <input type="checkbox"/> SINGLE BORE <input type="checkbox"/> 2-3/4" <input type="checkbox"/> RADIUS CORNER <input type="checkbox"/> DOUBLE BORE <input type="checkbox"/> <input type="checkbox"/> MORTISE LOCK (TEMPLATE REQUIRED)	SWING-IN <input type="checkbox"/> MILL/OAK ADJUSTABLE <input type="checkbox"/> BRONZE/OAK ADJUSTABLE <input type="checkbox"/> NICKEL/OAK ADJUSTABLE <input type="checkbox"/> BRONZE/COMPOSITE ADJUSTABLE THICKNESS <input type="checkbox"/> 4" .106 <input type="checkbox"/> 4" .130 <input type="checkbox"/> 4-1/2" .134 <input type="checkbox"/> STEEL BASE <input type="checkbox"/> NON-FERROUS	LHSO RHHSI RHHSO OUTSIDE VIEW	GOOD <input type="checkbox"/> BETTER <input type="checkbox"/> BEST <input type="checkbox"/> STD US3-4 BRIGHT BRASS US3 POLISHED BRASS US10B OIL RUBBED BRONZE US15 SATIN NICKEL US26D BRUSHED CHROME US32D BRUSHED STAINLESS	THICKNESS <input type="checkbox"/> 4" .106 <input type="checkbox"/> 4" .130 <input type="checkbox"/> 4-1/2" .134 <input type="checkbox"/> STEEL BASE <input type="checkbox"/> NON-FERROUS	LHSO RHHSI RHHSO OUTSIDE VIEW	4-13/16" <input type="checkbox"/> 6-13/16" <input type="checkbox"/> 7-1/4" <input type="checkbox"/> Q-LON <input type="checkbox"/> BROWN <input type="checkbox"/> WHITE	PRIMED <input type="checkbox"/> HEMLOCK <input type="checkbox"/> VG FIR <input type="checkbox"/>	EACH

SPECIAL NOTES:
#1 ROUGH OPENING
 EXISTING ROUGH OPENING IS:
 SAVAGE TO FURNISH REQUIRED ROUGH OPENING INFORMATION
#2 ROUGH OPENING
 EXISTING ROUGH OPENING IS:
 SAVAGE TO FURNISH REQUIRED ROUGH OPENING INFORMATION



ORDER QUOTE CONFIRMATION

FAX 253-383-2420 800-645-5975

APPROVED BY _____ DATE _____

QUOTE/ORDER NUMBER _____

QUOTE TO: _____ SHIP TO: _____ DATE: _____

ADDRESS: _____ ADDRESS: _____ PAGE: _____ OF _____

PHONE # _____ CONTACT: _____ PURCHASE ORDER # _____

VIA: _____ EST. SHIP DATE _____ MARK FOR: _____

SIDELITE	DOOR	SIDELITE	TRANSOM
SIZE _____	SIZE _____	SIZE _____	SIZE _____
<input type="checkbox"/> OPERATING <input type="checkbox"/> SINGLE <input type="checkbox"/> PAIR	<input type="checkbox"/> OPERATING		
STILE WIDTH <input type="checkbox"/> STD <input type="checkbox"/> WIDE			

PRICE FOR DOOR/UNIT ON THIS PAGE \$ _____

CRATING CHARGE \$ _____

F.O.B. OUR WAREHOUSE CUSTOMER FREIGHT CHARGE \$ _____

PRICES ARE NET AND DO NOT INCLUDE SALES TAX-QUOTES ARE GOOD FOR 30 DAYS

WOOD SPECIES or MATERIAL	PANEL TYPE	GLASS TYPE
<input type="checkbox"/> SM FIBERGLASS	<input type="checkbox"/> STD	<input type="checkbox"/> CLEAR <input type="checkbox"/> SINGLE GLAZED
<input type="checkbox"/> TX FIBERGLASS	<input type="checkbox"/> RAISED	<input type="checkbox"/> LOW E <input type="checkbox"/> INSULATED
<input type="checkbox"/> STEEL	<input type="checkbox"/> FLAT	<input type="checkbox"/> DECORATIVE TYPE
<input type="checkbox"/> VG FIR		<input type="checkbox"/> CAMING <input type="checkbox"/> BRASS <input type="checkbox"/> ZINC <input type="checkbox"/> PATINA
<input type="checkbox"/> HEMLOCK		
<input type="checkbox"/> OTHER SPECIE/ DETAILS		


LOCK PREP

NO BORE 2-3/8" DRIVE-IN

SINGLE BORE 2-3/4" RADIUS CORNER

DOUBLE BORE _____

MORTISE LOCK (TEMPLATE REQUIRED)

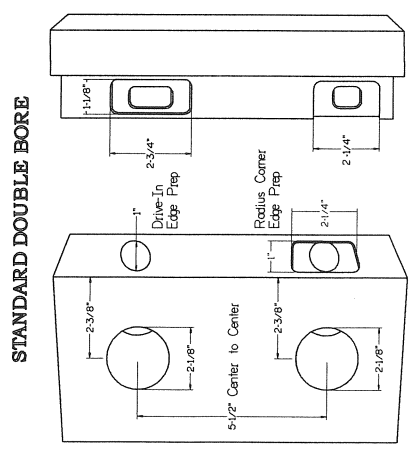

HINGES

THICKNESS 4" .099 STD US3-4 BRIGHT BRASS

GOOD BETTER BEST US3 POLISHED BRASS

4-1/2" .134 US10 OIL RUBBED BRONZE

STEEL BASE US15 SATIN NICKEL

NON-FERROUS US26D BRUSHED CHROME

BALL-BEARING US32D BRUSHED STAINLESS

W&F THREE POINT LOCKING SYSTEM

HANDLE STYLE ECLIPSE PINNACLE HORIZON

FINISH BRIGHT BRASS SATIN NICKEL VICTORIAN BRONZE

ASTRAGALS FOR PAIRS

MATCHING SPECIES & TEXTURED FIBERGLASS

WHITE ALUM-WOOD FOR STEEL AND SMOOTH FIBERGLASS

W&F MULTI-POINT SYSTEM

12" EXTENDED FLUSH BOLT FOR EIGHT FOOT DOORS

SWING-OUT SILLS

MILL/OAK BUMPER

BRONZE/OAK BUMPER

NICKEL/OAK BUMPER

BRONZE/COMPOSITE BUMPER

SWING-IN

MILL/OAK ADJUSTABLE

BRONZE/OAK ADJUSTABLE

NICKEL/OAK ADJUSTABLE

BRONZE/COMPOSITE ADJUSTABLE

ROUGH OPENING

EXISTING ROUGH OPENING IS: _____

SAVAGE TO FURNISH REQUIRED ROUGH OPENING INFORMATION

JAMBS

SIZE 4-9/16" 6-9/16"

SPECIE PRIMED HEMLOCK VG FIR

WITH WP180 BRICKMOULD NO BRICKMOULD

COMPOSITE SMOOTH 4-9/16" 6-9/16"

COMPOSITE TEXTURED 4-9/16" 6-9/16"

WITH WP180 BRICKMOULD NO BRICKMOULD

